



# MASTER TL-D Super 80

## MASTER TL-D Super 80 18W/840 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Luminous efficacy (rated) (nom.)		75 lm/W	
Cap base	G13 [ Medium Bi-Pin Fluorescent]	Colour rendering index (nom.)	>80		
Life to 10% failures (nom.)	12000 h	LLMF 2000 h Rated	96 %		
Life to 50% failures (nom.)	15000 h	LLMF 4000 h Rated	95 %		
Life to 50% failures preheat (nom.)	20000 h	LLMF 6000 h Rated	94 %		
LSF 2000 h Rated	99 %	LLMF 8000 h Rated	93 %		
LSF 4000 h Rated	99 %	LLMF 12000 h Rated	92 %		
LSF 6000 h Rated	99 %	LLMF 16000 h Rated	91 %		
LSF 8000 h Rated	99 %	LLMF 20000 h Rated	90 %		
LSF 12000 h Rated	89 %				
LSF 16000 h Rated	33 %				
LSF 20000 h Rated	2 %				
Light Technical		Operating and Electrical			
Colour Code	840 [ CCT of 4,000 K]	Power (Rated) (Nom)	18 W		
Luminous flux (nom.)	1350 lm	Lamp current (nom.)	0.360 A		
Luminous flux (rated) (nom.)	1350 lm				
Colour designation	Cool White (CW)				
Correlated Colour Temperature (Nom)	4100 K				
		Temperature			
		Design temperature (nom.)	25 °C		

# MASTER TL-D Super 80

## Controls and Dimming

Dimmable	Yes
----------	-----

## Approval and Application


Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.0 mg
Energy consumption kWh/1,000 hours	22 kWh

## Product Data

Full product code	871150063171840
Order product name	MASTER TL-D Super 80 18W/840 1SL/25

EAN/UPC – product	8711500631718
Order code	63171840
Local order code	18840
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	927920084023
SAP net weight (piece)	71.000 g
ILCOS code	FD-18/40/1B-E-G13


## Dimensional drawing

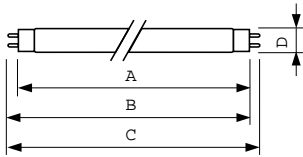


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

## TL-D 18W/840

## Photometric data

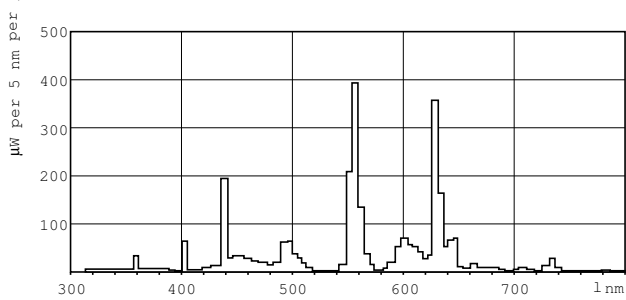

## Lightcolour /840

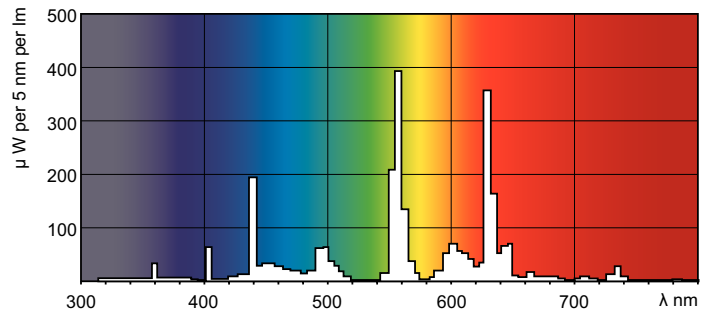

## Lightcolour /840

# MASTER TL-D Super 80

## Lifetime



LDLE\_TL-D8\_0001-Life expectancy diagram

LDLE\_TL-D8\_0002-Life expectancy diagram



LDLM\_TL-D8\_0001-Lumen maintenance diagram

