


Rampmat

Banish cold hard concrete floors with our entry level rubber anti-fatigue mat

- Provide standing relief to all workers with this economical anti-fatigue mat.
- Raised circular surface provides effective slip resistance.
- Open drainage holes capture spilt liquids, swarf or other debris to help prevent slips.
- Moulded ramped edges to reduce the risk of trips and allow wheeled access.
- Made from hardwearing rubber for durability.
- Slip tested to DIN 51130.

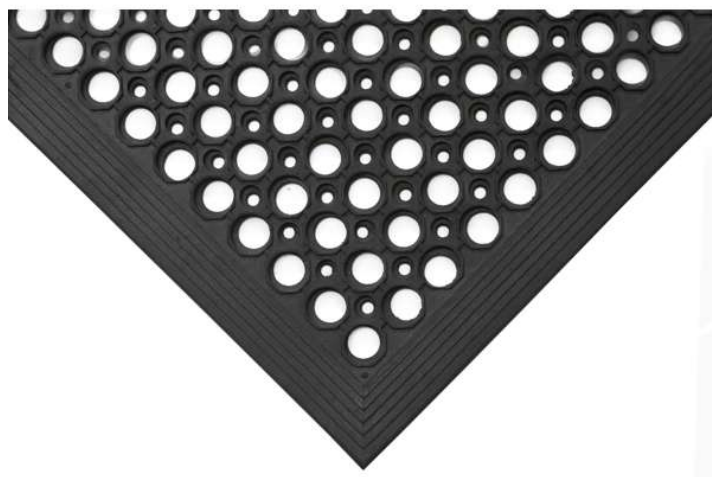

SKU	Size EN	Part Description EN	Colour EN	Weight (kg)
RMR010001	0.8 m x 1.2 m		Black	9.00
RP010001	0.9 m x 1.5 m		Black	9.00
RP010002	0.8 m x 1.2 m		Black	5.40

Technical Specification

Cleaning Method:	Wash with cold water, use vacuum cleaner or use pressure pump to remove dirt
COO (Country of Origin):	IN
Environmental Resistance:	Suitable for wet and dry environments, indoors or outdoors
Installation Method:	Loose lay
Material:	Rubber mix, including >50% recycled material
Max. Operating	+130°C
Min. Operating	-20°C
Notes:	Silicone is used in the production process of the mats and a residue will possibly be left on the mat
Product Height:	14 mm
Product Weight:	7.3 kg / m ²
Slip Tested to:	DIN 51130 - R10
Surface Finish:	Raised circular surface
Tensile Strength:	2.75 to 3.25 MPa
Typical Applications:	General industrial, Areas where swarf is prevalent. Entrance areas.




Catering Features

- Low cost but durable comfort mat for the workplace.
- Raised circular surface for slip resistance.
- Open drainage holes for spilt liquids.
- Made from hardwearing NBR rubber.
- Moulded bevelled edges reduce trip hazards.



Entrance Features

- A popular choice of doormat, suitable for most climates.
- The raised honeycomb design provides grip while scraping away dirt and moisture.
- Moulded bevelled edging for trip-resistance and wheeled access.
- Manufactured from durable rubber.
- Slip tested to DIN 51130.

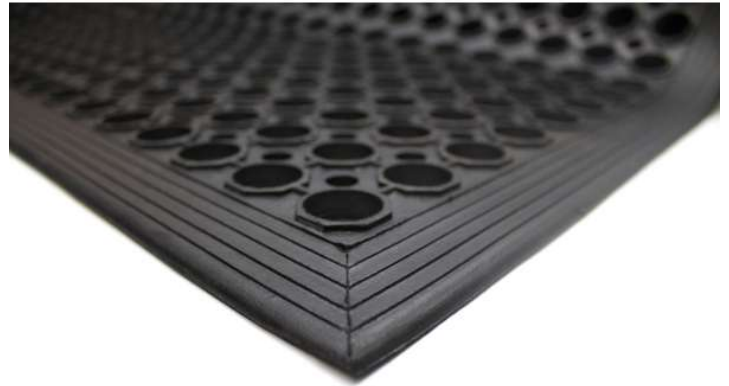

Parent SKU

SKU

RP01