

Wireless Headphones



www.hope-education.co.uk


In the box



Headphones x6



Transmitter x1



Adaptor x1



6-port USB desktop charger x1





3.5MM male to male cable x1



Micro USB lead x6


Product overview

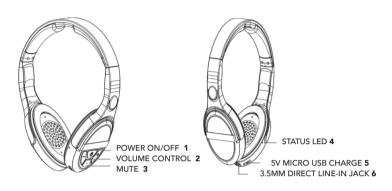

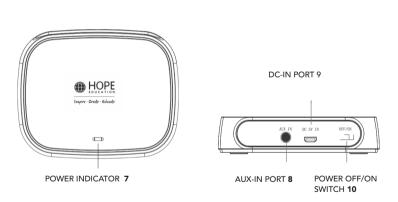

Set up

- Plug the supplied adaptor into the DC port located on the transmitter.
 Plug the other end of the adaptor into the wall.
- Slide the Power Switch to ON. The transmitter's LED should be solid blue.
- Connect the transmitter to an audio source using the 3.5MM Male to Male Audio Cable (included).

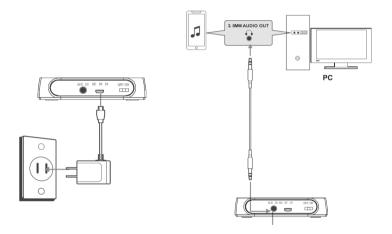

Please note: If no audio signal is detected after 5 minutes, the blue LED on the headphones will turn off and the headphones will be automatically shut down. If you need to use the headphones, simply press the power button again.

Charging the headphones

- Before using the headphones for the first time, please charge the batteries for 6 hours.
- 2. The 6-port desktop charger can charge 6 headphones simultaneously. Ensuring the headphones are off, connect the charging port on the headphones to the desktop charger using the leads provided. The headphone's LED will turn red to show the headphones are charging. When the headphones are fully charged, the LED will turn off.

Changing the ear cushions

The ear cushion is held in place by four clips. Gently unclip the ear cushion as shown.

Replace the ear cushion and then clip back into position.

Replacement ear cushions are available from Hope education.



Pairing Mode

The headphones and the transmitter enclosed in the package have already been paired. Up to 12 headphones can be paired to one transmitter

To enter pairing mode:

- Connect the transmitter to a power source and slide the Power Switch to ON. Then turn the headphones on.
- Locate the MUTE button on the headphones and press and hold it for 3 seconds. The status LED on the headphones will flash.
- Locate the PAIRING button on the bottom of the transmitter and press and hold it for 3 seconds. The power LED on the transmitter will flash.
- 4. When your headphones are paired there will be a short beep in the headphones. The status LED on the headphones and the power LED on the transmitter will become steady blue





Specification

Transmission mode: Digital Hopping

System Carrier frequency: 2.4GHZ

Frequency response: 20 Hz – 20 KHz

Operating voltage: Transmitter: 5V 500mA

Receiver: Li-Polymer Battery 3.7V 400mAh

Signal-to-noise ratio: 90dB

Distortion: 0.5%

Range: 100ft (approx.30m)

Charging time: 1.5-2.0 hours

Working Time: 8 hours

Care and maintenance

If necessary, wipe the gently with a clean damp cloth. Do not use solvents or abrasives.

Warranty

The product is guaranteed for a period of one year from the date of delivery. This warranty does not apply to defects resulting from the action of a user such as misuse, improper wiring, any operations outside of its specification, improper maintenance or repair, or unauthorized modification.

Our liability is limited to repair or replacement of the product. Any failure during the warranty period should be referred to our Customer Services team.



Inspire · Create · Educate





Manufactured in China for Hope Education Gregory street, Hyde, Cheshire, SK14 4RH, UK